

PC-6000 Range

PC Based Bar Code Verifiers

Axicon

auto id



Product Summary

The Axicon range of PC verifiers provide high quality, sophisticated, yet easy to use barcode quality control. They check all aspects of the printed barcode symbol and present the verification data in a clear and comprehensive manner.

With these high specification CEN Class A verifiers all of your verification needs are fully met. Simply install the software on your PC, plug in the verifier and you can rest assured that your barcodes are being checked to the highest quality standards.

With accurately produced calibration sheets the Axicon PC Verifier can form an integral part of your ISO9000 quality control procedures.




The Axicon PC-6000 range comprises CCD based verifier hardware and Windows software, to the latest ISO/CEN/ANSI verification standards.

Exclusive software upgrade features, including UCC/EAN-128 data content checking and Product Look Up, can either be supplied as part of the package or as a field upgrade to the standard unit.

Free software updates for three years and a software upgrade path ensure that the verifier will remain at the leading edge.

Features/Benefits

- ISO/CEN/ANSI Verification Standards
- Traditional Verification Standards
- CEN Class A Verifier
- Symbology Auto-Discrimination
- Automatic Variable Aperture
- Scan Storage & Replay
- Static Reflectance Meter
- Display of Nominal Bar Width
- UCC/EAN-128 Data Content Checker
- Product Look-up Option
- Individual Bar/Space Dimensional Analysis

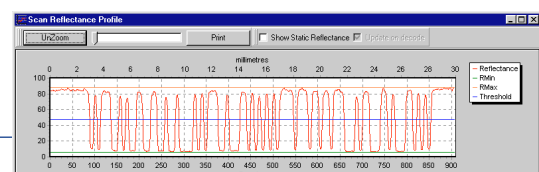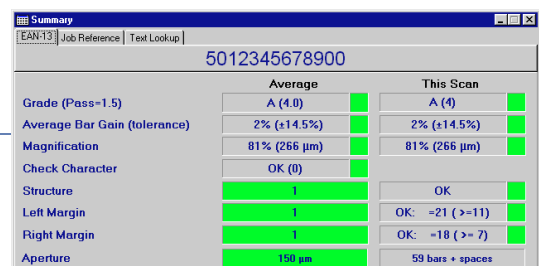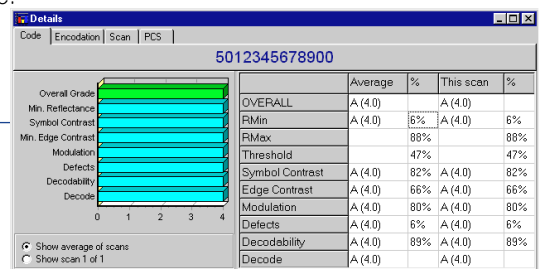

Axicon - For Barcode Quality

THE RANGE

- PC-6000:** Standard Model
- PC-6005:** *Product Look Up Option* - links the software to any database so that when you scan the barcode you get a description of the product that the bar code should relate to as well as the quality control information.
- PC-6010:** *UCC/EAN-128 Data Content Checker* - gives the user descriptions of the application identifiers used and then validates the information following, checking for possible structure and content errors (e.g. date errors, check digit errors, incorrect field lengths etc).
CSV File Storage - enables verified data to be stored to disk as a c.s.v. text file to enable the user to analyse their results using Excel, Lotus or any similar Windows spreadsheet program. - can be set to record all data automatically if required.
- PC-6015:** All of the above features.

SOFTWARE SPECIFICATIONS

- **Windows™ based program - free updates for three years if registered**
- **Symbologies Verified:** RSS (all symbologies), EAN-8, EAN-13 (with or without addons), UPC-A, UPC-E (with or without addons), ITF/Case Code, Code 39, Code 39 ASCII, Codabar, Code128, UCC/EAN-128, Italian Pharmacode, HIBC.
- **Analysis on relevant Symbologies:** Full ISO/CEN/ANSI Parameter Analysis - Rmax, Rmin, Global Threshold, Symbol Contrast, Defects, Decodability, Decode, Full Traditional Verification - Print Contrast Measurement (PCS) and Nominal Bar Width Analysis, Light Margin Validation, Check Digit Verification, Data Length, Parity, Control Characters and Structure Checking, Wide to Narrow Bar Ratio Display and Verification, Full Data Encodation including Subsets & Start/Stop Characters, Full Bar/Space Dimensional Analysis/Decodability per Character Set (to ISO standards)
- **Error Messages:** Audible Warnings, User-Changeable Warning Colours, Check Digit Error, Structure Error, Light Margin Error, Reference Decode Algorithm Error.
- **User Settable Features:** Time and Date (through Windows), Reflectance Calibration, Pass/Fail Grade, Variable Multi-Scan Averaging.
- **On Screen Diagnoses:** Command screen, Summary and Details results screens, Pass/Fail screen / Traditional results screen, Scan Reflectance Profile, Static Scan Reflectance, Dimensional Analysis. Options: UCC/EAN-128 Data Content, Product-Look-Up Table.
- **Logging:** Scan Storage and Replay - stores reflectance values to enable playback of data and remote diagnostics.
- **Calibration Logging:** A record of date and time to show when the hardware has been calibrated can be kept. Especially important for ISO9000 records.
- **Job Number Storage Ref:** A reference number can be allocated against printouts and stored results. Important for tracking and recalling results.
- **ISBN/ISSN Decode:** Shows original ISBN/ISSN number of EAN13 retail publication bar codes.
- **Coupon Code Decode:** Shows monetary value of standard EAN13 and UCC coupon codes.

HARDWARE SPECIFICATIONS

Dimensions	165 x 75(50) x 55 mm, Scan Width - 72mm (including light margins)
Weight	250g
Construction	Interface Unit - Black ABS plastic
Interface	RS232C Serial to PC Computer
Power	Current Draw - 110mA, External Power Required (supplied with PS2 cable to take power from keyboard port - optional AT/XT cable or 5V Regulated PSU available)
Nominal Measuring Aperture	100 microns (4mil), 125microns (5mil), 150microns (6mil), 250microns (10mil) and 500microns (20mil). Automatically identifies symbology and nominal bar size (X dimension) and adjusts aperture size automatically in accordance with symbology specifications and International Standards to ensure accurate verification.
Wavelength of Light	660 nanometers

GENERAL INFORMATION

- Print of Analysis:** A hard copy analysis can be produced on any printer for which a Windows' driver is available, whether dot-matrix, ink-jet, laser or thermal transfer. The printout will be automatically resized to suit the output media size, thus enabling verification reports to be printed to self-adhesive labels if required. Printouts can be produced for: the main verification information*, scan reflectance profiles and also for the UCC/EAN-128 data content information. * (includes: Time & Date, Number of Scans, Code Type, Average ANSI/CEN Grade, Average Bar Gain, Magnification, Check Character, Light Margin, Scan Analysis and Grading Percentage Values)
- Standard Accessories:** Carry Case, Bar Code Scale Rule, DB9 Serial Interface Cable, Power Input Cable (PS2), Calibration Sheet and User Manual.
- System Requirements:** IBM or compatible PC (486 or higher preferred), running Windows 95 or higher. (Software version 1.15 available for Windows 3.1 and 3.11 users but with limited features)

ISO/CEN/ANSI verifier aperture size- nominal bar size ratio guide:

5mil - Less than 330 microns generally the smaller barcodes - see PC-6000 range

10mil - 330 to 635 microns Small ITF and all UCC/EAN-128 codes

20mil - Greater than 635 microns large ITF codes usually printed directly onto corrugated card

[For all UPC and EAN retail codes both the UCC and EAN International specify that a 150micron (6mil) aperture should be used]

For more information contact :